

Parrilla GMB 200



FEATURES

Precision and strength defines the new PARRILLA by MIBRASA®.

Thanks to the carefully engineered design with elevation system and positional brake, the Mibrasa® Parrilla effortlessly regulates the height of the grill from the heat of embers with maximum safety and minimum maintenance.

The Mibrasa® Parrilla lets us sear, cook and rest our ingredients, achieving the optimal result every time.

ERGONOMIC DESIGN. MAXIMUM QUALITY AND SECURITY

With a sloping grill, the grease runs down the weld-free grill bars to prevent grease build-up. Grease drips down to the collector with an easy to remove mechanism ready to clean.

The base is lined with refractory bricks to ensure maximum heat efficiency and resistance to pure fire. And the built-in cooling system in outer case guarantees a maximum level of security.

Built using quality steels providing strength and durability; ergonomically designed for practicality and ease of use, each feature plays a crucial part in delivering the ultimate grilling machine for every chef.


TECHNICAL INFORMATION


	ν	
Fire up time¹	30 min-average	
0 1: 1	482 °F	
Cooking temperature	250 °C	
1. 11. 11	66 lb	
Initial charcoal load ¹	30 kg	
Charcoal load duration ²	7 h	
F ' . *	8 hp	
Equivalent power*	6 kW	
	294 gal/s	
Exhaust rate	4000 m³/h	
1 1 11 12 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	27.56 in	
Installation height*	700 mm	
N - + i - - - -	1367 lb	
Net weight ³	620 kg	

*Approximate data 1. Consult instruction manual 2. Will vary depending on quality of charcoal 3. Weight with accessories included

GRILL DIMENSIONS

HEATING RACK DIMENSIONS





INCLUDED ACCESSORIES

- 2 round bar grill
- 2 heating rack grills
- Ash shovel
- Ember poker
- Mibrasa tongs
- Grill brush
- Mibrasa Ecofire fireligthers

OPTIONAL ACCESSORIES

- V-shape grill
- Extra round bar grill
- Parrilla stand

Specifications and design are subject to change without notice.

QUALITY GUARANTEE














Parrilla GMB 200

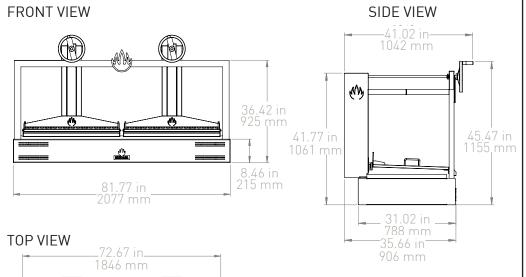

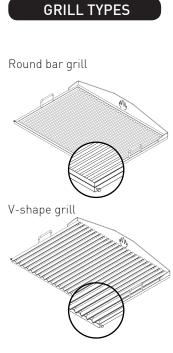



А	Reverse elevating system
В	Elevating wheel
С	Heating rack
D	Structure
Е	Grill
F	Grease collector
G	Refractory bricks
Н	Main body

SHIPMENT

- Crated weight:
 1697 lb [770 kg]
- Crated size (WxDxH): 43x87x47 in [1100x2200x1200 mm]

Revit drawings available on request at usa@mibrasa.com

Safety standards and installation guidelines

- Do not place combustible materials within a distance of 28 in [710 mm] from the top, bottom, rear or side of the Mibrasa® Parrilla GMB.
- Combustible floor protection dimensions: a. 30 in [762 mm] to each side of the Parrilla
 - b. 36 in [914 mm] in front of the Parrilla
- Clearances to construction/other appliances: a. Unit to backwall = 3 in [76 mm]
 - b. Unit to sidewalls = 3 in [76 mm]
- The workspace for the chef should be 27.56 in [700 mm] from the front of the Parrilla.
- A lifting device should be used whenever possible to lift the Parrilla and place on the countertop/stand.

For further information, please consult the instruction manual.

Specifications and design are subject to change without notice.

7300 N. Kendall Drive, Suite 470 MIAMI, FL 33156 Ph: (408) 348 7670 - usa@mibrasa.com www.mibrasa.com